

Technical Guidance Note 287

# Third-party guidance for working near National Grid Electricity Transmission equipment

---





<b>Purpose and scope.....</b>	<b>3</b>	Risk of impact identification.....	5
Contact National Grid.....	3	<b>Risks or hazards to be aware of.....</b>	<b>6</b>
How to identify specific National Grid sites.....	3	Land and access.....	6
Plant protection.....	3	Electrical clearance from overhead lines.....	6
Emergencies.....	3	Underground cables.....	7
		Impressed voltage.....	7
<b>Part 1 – Electricity Transmission infrastructure.....</b>	<b>4</b>	Earth potential rise.....	8
Overhead lines.....	4	Noise.....	8
Underground cables.....	4	Maintenance access.....	8
Substations.....	4	Fires and firefighting.....	9
		Excavations, piling or tunnelling.....	9
<b>Part 2 – Statutory requirements for working near high-voltage electricity....</b>	<b>4</b>	Microshocks.....	9
Electrical safety clearances.....	4	<b>Specific development guidance.....</b>	<b>10</b>
		Wind farms.....	10
<b>Part 3 – What National Grid will do for you and your development.....</b>	<b>5</b>	Commercial and housing developments.....	10
<b>Provision of information.....</b>	<b>5</b>	Solar farms.....	11
Drawings.....	5	<b>Asset protection agreements.....</b>	<b>12</b>
		<b>Contact details.....</b>	<b>12</b>
		Emergency situations.....	12
		Routine enquiries.....	12



#### Disclaimer

National Grid Gas Transmission and National Grid Electricity Transmission or their agents, servants or contractors do not accept any liability for any losses arising under or in connection with this information. This limit on liability applies to all and any claims in contract, tort (including negligence), misrepresentation (excluding fraudulent misrepresentation), breach of statutory duty or otherwise. This limit on liability does not exclude or restrict liability where prohibited by the law, nor does it supersede the express terms of any related agreements.



# Purpose and scope

The purpose of this document is to give guidance and information to third parties who are proposing, scheduling or designing developments close to National Grid Electricity Transmission assets.


The scope of the report covers information on basic safety and the location of our assets – and also highlights key issues around particular types of development and risk areas.

In the case of electrical assets, National Grid does not authorise or agree safe systems of work with developers and contractors. However, we will advise on issues such as electrical safety clearances and the location of towers and cables. We also work with developers to minimise the impact of any National Grid assets that are nearby.

## How to identify specific National Grid sites

### Substations

The name of the substation and the emergency contact number will be on the site sign.



### Overhead lines

The reference number of the tower and the emergency contact number will be on this type of sign.



## Contact National Grid

### Plant protection

For routine enquiries regarding planned, scheduled or emergency works, contact the Plant Protection team online, by email, post or phone.

**www.beforeyoudig.nationalgrid.com**

**Email:** plantprotection@nationalgrid.com

**Phone:** 0800 688 588

### Write to:

National Grid Plant Protection  
Brick Kiln Street  
Hinckley  
Leicestershire  
LE10 0NA

### Emergencies

In the event of occurrences such as a cable strike, coming into contact with an overhead line conductor or identifying any hazards or problems with National Grid's equipment, phone our emergency number 0800 404 090 (option 1).

If you have apparatus within 30m of a National Grid asset, please ensure that the emergency number is included in your site's emergency procedures.

### Consider safety

Consider the hazards identified in this document when working near electrical equipment



## Part 1

### Electricity transmission infrastructure

---

National Grid owns and maintains the high-voltage electricity transmission network in England and Wales (Scotland has its own networks). It's responsible for balancing supply with demand on a minute-by-minute basis across the network.

#### Overhead lines

Overhead lines consist of two main parts – pylons (also called towers) and conductors (or wires). Pylons are typically steel lattice structures mounted on concrete foundations. A pylon's design can vary due to factors such as voltage, conductor type and the strength of structure required.

Conductors, which are the 'live' part of the overhead line, hang from pylons on insulators. Conductors come in several different designs depending on the amount of power that is transmitted on the circuit.

In most cases, National Grid's overhead lines operate at 275kV or 400kV.

#### Underground cables

Underground cables are a growing feature of National Grid's network. They consist of a conducting core surrounded by layers of insulation and armour. Cables can be laid in the road, across open land or in tunnels. They operate at a range of voltages, up to 400kV.

#### Substations

Substations are found at points on the network where circuits come together or where a rise or fall in voltage is required. Transmission substations tend to be large facilities containing equipment such as power transformers, circuit breakers, reactors and capacitors. Diesel generators and compressed air systems are also found there.

## Part 2

### Statutory requirements for working near high-voltage electricity

---

The legal framework that regulates electrical safety in the UK is *The Electricity Safety, Quality and Continuity Regulations (ESQCR) 2002*. This also details the minimum electrical safety clearances, which are used as a basis for the Energy Networks Association (ENA) TS 43-8. These standards have been agreed by CENELEC (European Committee for Electrotechnical Standardisation) and also form part of the *British Standard BS EN 50341-1:2012 Overhead Electrical Lines exceeding AC 1kV*. All electricity companies are bound by these rules, standards and technical specifications. They are required to uphold them by their operator's licence.

#### Electrical safety clearances

It is essential that a safe distance is kept between the exposed conductors and people and objects when working near National Grid's electrical assets. A person does not have to touch an exposed conductor to get a life-threatening

electric shock. At the voltages National Grid operates at, it is possible for electricity to jump up to several metres from an exposed conductor and kill or cause serious injury to anyone who is nearby. For this reason, there are several legal requirements and safety standards that must be met.

Any breach of legal safety clearances will be enforced in the courts. This can – and has – resulted in the removal of an infringement, which is normally at the cost of the developer or whoever caused it to be there. Breaching safety clearances, even temporarily, risks a serious incident that could cause serious injury or death.

National Grid will, on request, advise planning authorities, developers or third parties on any safety clearances and associated issues. We can supply detailed drawings of all our overhead line assets marked up with relevant safe areas.



## Part 3

### What National Grid will do for you and your development

#### Provision of information

National Grid should be notified well in advance of any works or developments taking place near our electrical assets. We can then provide the following services:

#### Drawings


National Grid will provide relevant drawings of overhead lines or underground cables to make sure the presence and location of our services are known. Once a third party or developer has contacted us, we will supply the drawings for free.

#### Risk or impact identification

National Grid can help identify any hazards or risks that the presence of our assets might bring to any works or developments. This includes both the risk to safety from high-voltage electricity and longer-term issues, such as induced currents, noise and maintenance access that may affect the outcome of the development. National Grid will not authorise specific working procedures, but we can provide advice on best practice.

# 400kV

*The maximum nominal voltage of the underground cables in National Grid's network*

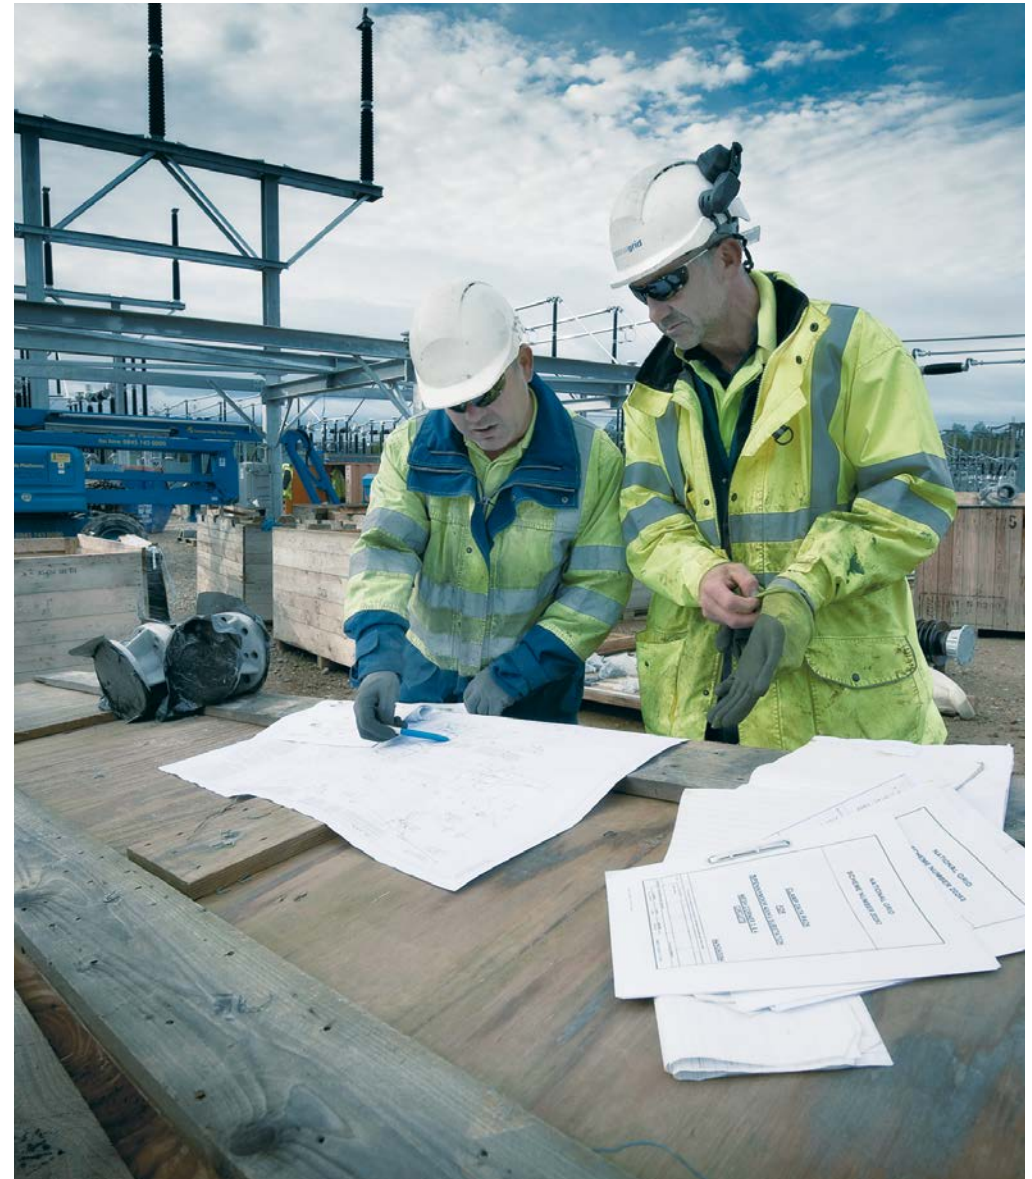



## Risks or hazards to be aware of

This section includes a brief description of some of the hazards and issues that a third party or developer might face when working or developing close to our electrical infrastructure.

### Land and access

National Grid has land rights in place with landowners and occupiers, which cover our existing overhead lines and underground cable network. These agreements, together with legislation set out under the *Electricity Act 1989*, allow us to access our assets to maintain, repair and renew them. The agreements also lay down restrictions and covenants to protect the integrity of our assets and meet safety regulations. Anyone proposing a development close to our assets should carefully examine these agreements.

Our agreements often affect land both inside and outside the immediate vicinity of an asset. Rights will include the provision of access, along with restrictions that ban the development of land through building, changing levels, planting and other operations. Anyone looking to develop close to our assets must consult with National Grid first.

### For further information, contact Plant Protection:

Email: [plantprotection@nationalgrid.com](mailto:plantprotection@nationalgrid.com)  
Phone: 0800 688 588

### Electrical clearance from overhead lines


*The clearance distances referred to in this section are specific to 400kV overhead lines. National Grid can advise on the distances required around different voltages i.e. 132kV and 275kV.*

As we explained earlier, *Electrical Networks Association TS 43-8* details the legal clearances to our overhead lines. The minimum clearance between the conductors of an overhead line and the ground is 7.3m at maximum sag. The sag is the vertical distance between the wire's highest and lowest point. Certain conditions, such as power flow, wind speed and air temperature can cause conductors to move and allowances should be made for this.

The required clearance from the point where a person can stand to the conductors is 5.3m. To be clear, this means there should be at least 5.3m from where someone could stand on any structure (i.e. mobile and construction equipment) to the conductors. Available clearances will be assessed by National Grid on an individual basis.

National Grid expects third parties to implement a safe system of work whenever they are near

Diagram not to scale

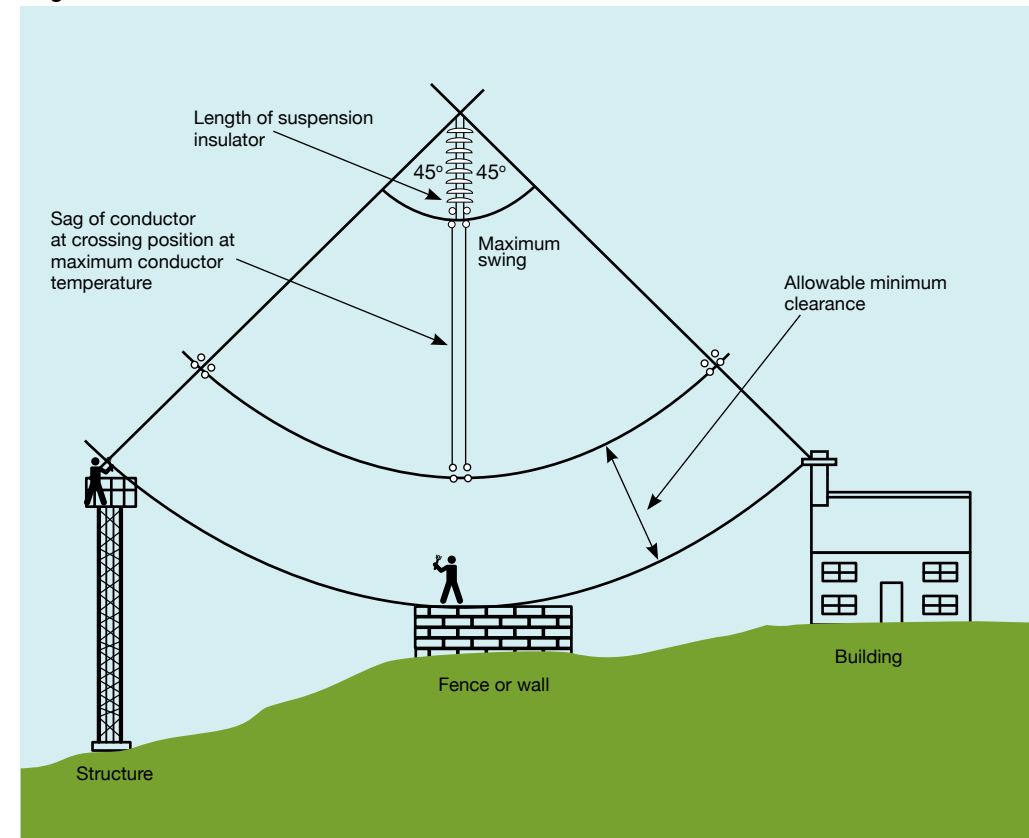

**There should be at least 5.3m between the conductors and any structure someone could stand on**

overhead lines. We recommend that guidance such as *HSE Guidance Note GS6 (Avoiding Danger from Overhead Power Lines)* is followed, which provides advice on how to avoid danger from all overhead lines, at all voltages. If you are carrying out work near overhead lines you must contact National Grid, who will provide the relevant profile drawings.

# 7.3m

*The required minimum clearance between the conductors of an overhead line, at maximum sag, and the ground*

Section continues on next page »



The undergrounding of electricity cables at Ross-on-Wye

« Section continued from previous page

### Underground cables

Underground cables operating at up to 400kV are a significant part of the National Grid Electricity Transmission network. When your works will involve any ground disturbance it is expected that a safe system of work is put in place and that you follow guidance such as *HSG 47 (Avoiding Danger from Underground Services)*.

You must contact National Grid to find out if there are any underground cables near your proposed works. If there are, we will provide cable profiles and location drawings and, if required, on-site supervision of the works. Cables can be laid under roads or across industrial or agricultural land. They can even be layed in canal towpaths and other areas that you would not expect.

Cables crossing any National Grid high-voltage (HV) cables directly buried in the ground are required to maintain a minimum separation that will be determined by National Grid on a case-by-case basis. National Grid will need to do a rating study on the existing cable to work out if there are any adverse effects on either cable rating. We will only allow a cable to cross such an area once we know the results of the re-rating. As a result, the clearance distance may need to be increased or alternative methods of crossing found.

For other cables and services crossing the path of our HV cables, National Grid will need confirmation that published standards and clearances are met.

### Impressed voltage

Any conducting materials installed near high-voltage equipment could be raised to an elevated voltage compared to the local earth, even when there is no direct contact with the high-voltage equipment. These impressed voltages are caused by inductive or capacitive coupling between the high-voltage equipment and nearby conducting materials and can occur at distances of several metres away from the

equipment. Impressed voltages may damage your equipment and could potentially injure people and animals, depending on their severity. Third parties should take impressed voltages into account during the early stages and initial design of any development, ensuring that all structures and equipment are adequately earthed at all times.

Section continues on next page »



« Section continued from previous page

### Earth potential rise

Under certain system fault conditions – and during lightning storms – a rise in the earth potential from the base of an overhead line tower or substation is possible. This is a rare phenomenon that occurs when large amounts of electricity enter the earth. This can pose a serious hazard to people or equipment that are close by.

We advise that developments and works are not carried out close to our tower bases, particularly during lightning storms.

### Noise

Noise is a by-product of National Grid's operations and is carefully assessed during the planning and construction of any of our equipment. Developers should consider the noise emitted from National Grid's sites or overhead lines when planning any developments, particularly housing. Low-frequency hum from substations can, in some circumstances, be heard up to 1km or more from the site, so it is essential that developers find adequate solutions for this in their design. Further information about likely noise levels can be provided by National Grid.


### Maintenance access

National Grid needs to have safe access for vehicles around its assets and work that restricts this will not be allowed. In terms of our overhead lines, we wouldn't want to see any excavations made, or permanent structures built, that might affect the foundations of our towers. The size of the foundations around a tower base depends on the type of tower that is built there. If you wish to carry out works within 30m of the tower base, contact National Grid for more information. Our business has to maintain access routes to tower bases with land owners. For that reason, a route wide enough for an HGV must be permanently available. We may need to access our sites, towers, conductors and underground cables at short notice.

# 30m

*If you wish to carry out work within this distance of the tower base, you must contact National Grid for more information*

Section continues on next page »

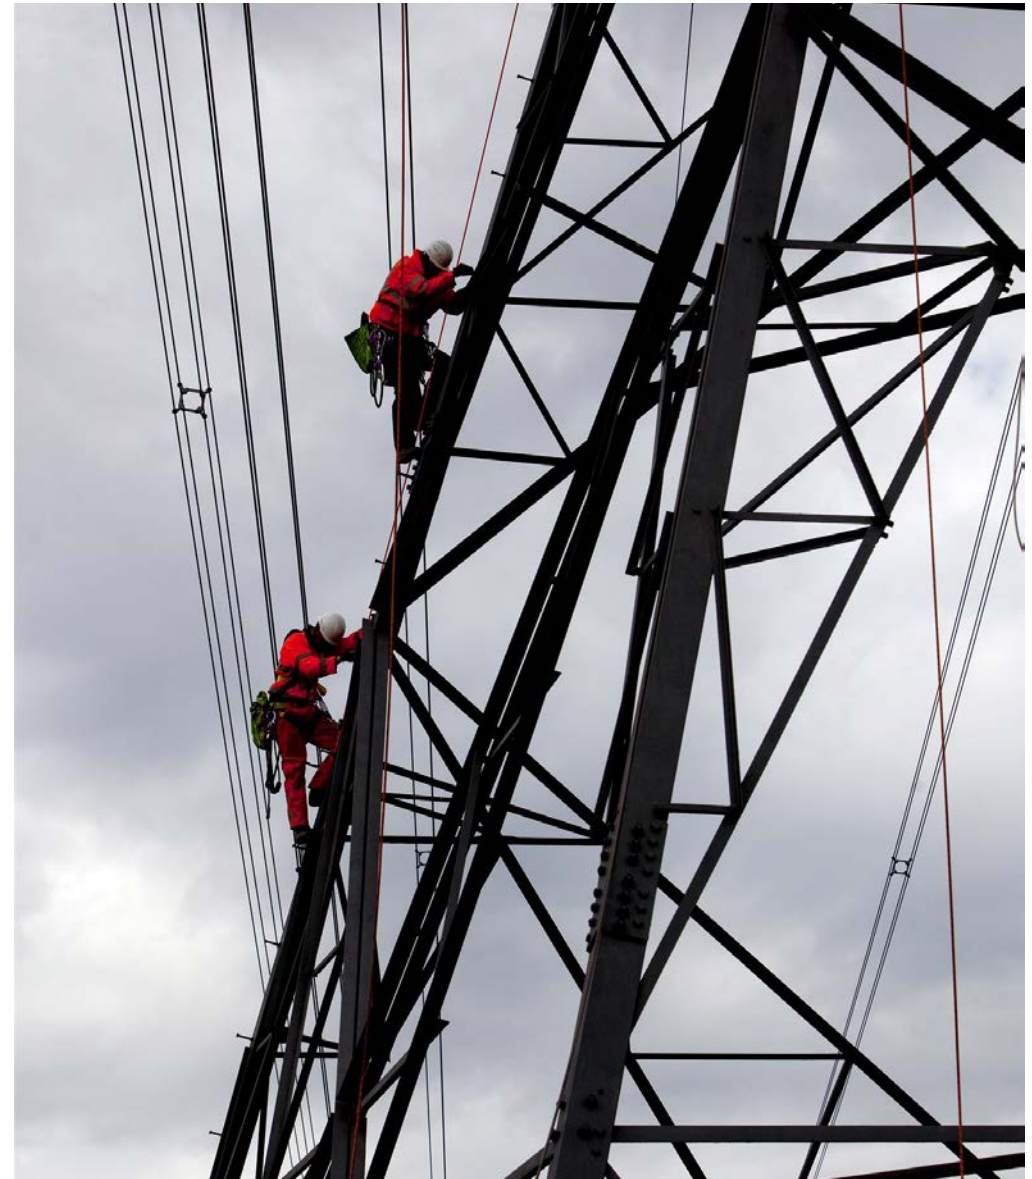





« Section continued from previous page

### Fires and firefighting

National Grid does not recommend that any type of flammable material is stored under overhead lines. Developers should be aware that in certain cases the local fire authority will not use water hoses to put out a fire if there are live, high-voltage conductors within 30m of the seat of the fire (as outlined in ENA TS 43-8).

In these situations, National Grid would have to be notified and reconfigure the system – to allow staff to switch out the overhead line – before any firefighting could take place. This could take several hours.

We recommend that any site which has a specific hazard relating to fire or flammable material should include National Grid's emergency contact details (found at the beginning and end of this document) in its fire plan information, so any incidents can be reported.

Developers should also make sure their insurance cover takes into account the challenge of putting out fires near our overhead lines.

### Excavations, piling or tunnelling

You must inform National Grid of any works that have the potential to disturb the foundations of our substations or overhead line towers. This will have to be assessed by National Grid engineers before any work begins.

*BS ISO 4866:2010* states that a minimum distance of 200m should be maintained when carrying out quarry blasting near our assets. However, this can be reduced with specific site surveys and changes to the maximum instantaneous charge (the amount of explosive detonated at a particular time).

All activities should observe guidance layed out in *BS 5228-2:2009*.

### Microshocks

High-voltage overhead power lines produce an electric field. Any person or object inside this field that isn't earthed picks up an electrical charge. When two conducting objects – one that is grounded and one that isn't – touch, the charge can equalise and cause a small shock, known as a microshock. While they are not harmful, they can be disturbing for the person or animal that suffers the shock.

For these reasons, metal-framed and metal-clad buildings which are close to existing overhead lines should be earthed to minimise the risk of microshocks. Anything that isn't earthed, is conductive and sits close to the lines is likely to pick up a charge. Items such as deer fences, metal palisade fencing, chain-link fences and metal gates underneath overhead lines all need to be earthed.

For further information on microshocks please visit [www.emfs.info](http://www.emfs.info).



# 200m

*The minimum distance that should be maintained from National Grid assets when quarry blasting*



## Specific development guidance

### Wind farms

National Grid's policy towards wind farm development is closely connected to the *Electricity Networks Association Engineering Recommendation L44 Separation between Wind Turbines and Overhead Lines, Principles of Good Practice*. The advice is based on national guidelines and global research. It may be adjusted to suit specific local applications.

There are two main criteria in the document:

- (i) The turbine shall be far enough away to avoid the possibility of toppling onto the overhead line
- (ii) The turbine shall be far enough away to avoid damage to the overhead line from downward wake effects, also known as turbulence

The toppling distance is the minimum horizontal distance between the worst-case pivot point of the wind turbine and the conductors hanging in still air. It is the greater of:

- the tip height of the turbine plus 10%
- or, the tip height of the turbine plus the electrical safety distance that applies to the voltage of the overhead line.

To minimise the downward wake effect on an overhead line, the wind turbine should be three times the rotor distance away from the centre of the overhead line.

Wake effects can prematurely age conductors and fittings, significantly reducing the life of the asset. For that reason, careful consideration should be taken if a wind turbine needs to be sited within the above limits. Agreement from National Grid will be required.


### Commercial and housing developments

National Grid has developed a document called *A Sense of Place*, which gives advice to anyone involved in planning or designing large-scale developments that are crossed by, or close to, overhead lines.

The document focuses on existing 275kV and 400kV overhead lines on steel lattice towers, but can equally apply to 132kV and below. The document explains how to design large-scale developments close to high-voltage lines, while respecting clearances and the development's visual and environmental impact.

Section continues on next page »

Diagram not to scale

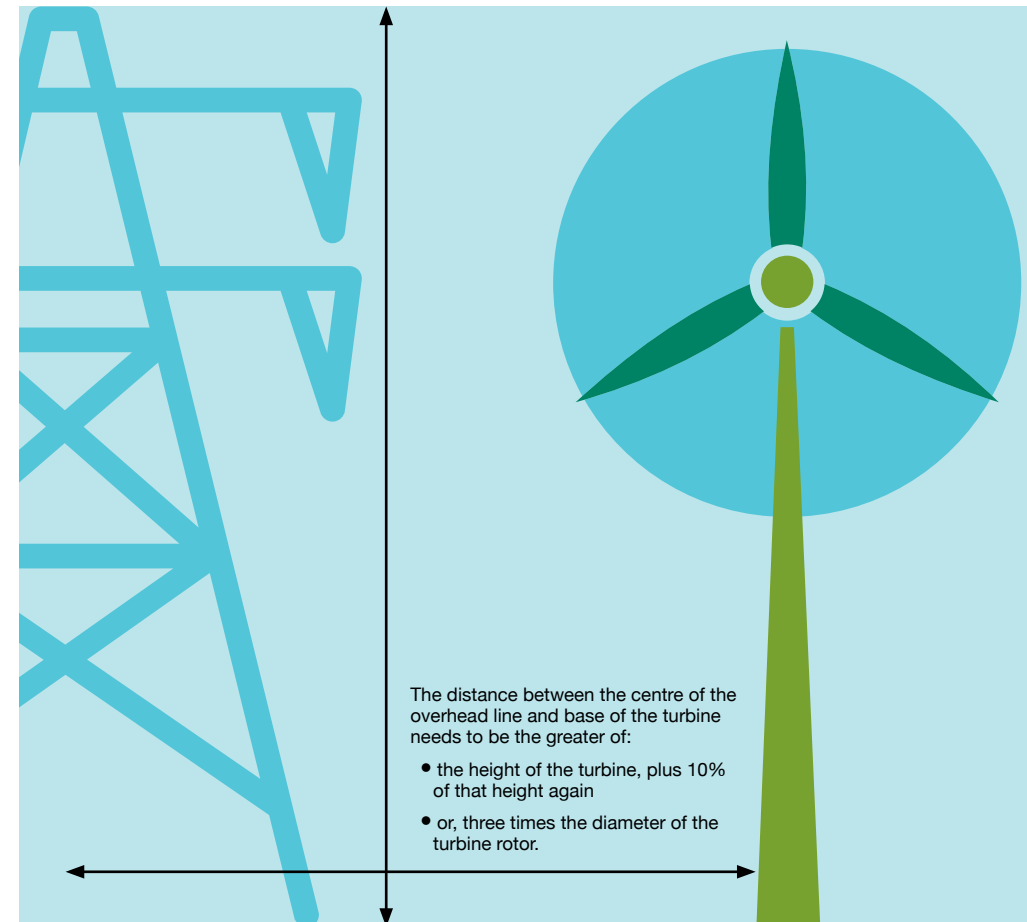

Turbines should be far enough away to avoid the possibility of toppling onto the overhead line



« **Section continued from previous page**

The advice is intended for developers, designers, landowners, local authorities and communities, but is not limited to those organisations.

Overall, developers should be aware of all the hazards and issues relating to the electrical equipment that we have discussed when designing new housing.

As we explored earlier, National Grid's assets have the potential to create noise. This can be low frequency and tonal, which makes it quite noticeable. It is the responsibility of developers to take this into account during the design stage and find an appropriate solution.

### Solar farms

Development of solar farms is a relatively new phenomenon. While there is limited research and recommendations available, there are several key factors to consider when designing them.

Developers may be looking to build on arable land close to National Grid's assets. In keeping with the safety clearance limits that we outlined earlier for solar panels directly underneath overhead line conductors, the highest point on the solar panels must be no more than 5.3m from the lowest conductors.

This means that the maximum height of any structure will need to be determined to make sure safety clearance limits aren't breached. This could be as low as 2m. National Grid will supply profile drawings to aid the planning of solar farms and determine the maximum height of panels and equipment.


Solar panels that are directly underneath power lines risk being damaged on the rare occasion that a conductor or fitting falls to the ground. A more likely risk is ice falling from conductors or towers in winter and damaging solar panels.

There is also a risk of damage during adverse weather conditions, such as lightning storms, and system faults. As all our towers are earthed, a weather event such as lightning can cause a rise in the earth potential around the base of a tower. Solar panel support structures and supply cables should be adequately earthed and bonded together to minimise the effects of this temporary rise in earth potential.

Any metallic fencing that is located under an overhead line will pick up an electrical charge. For this reason, it will need to be adequately earthed to minimise microshocks to the public.

For normal, routine maintenance and in an emergency National Grid requires unrestricted access to its assets. So if a tower is enclosed in a solar farm compound, we will

Diagram not to scale

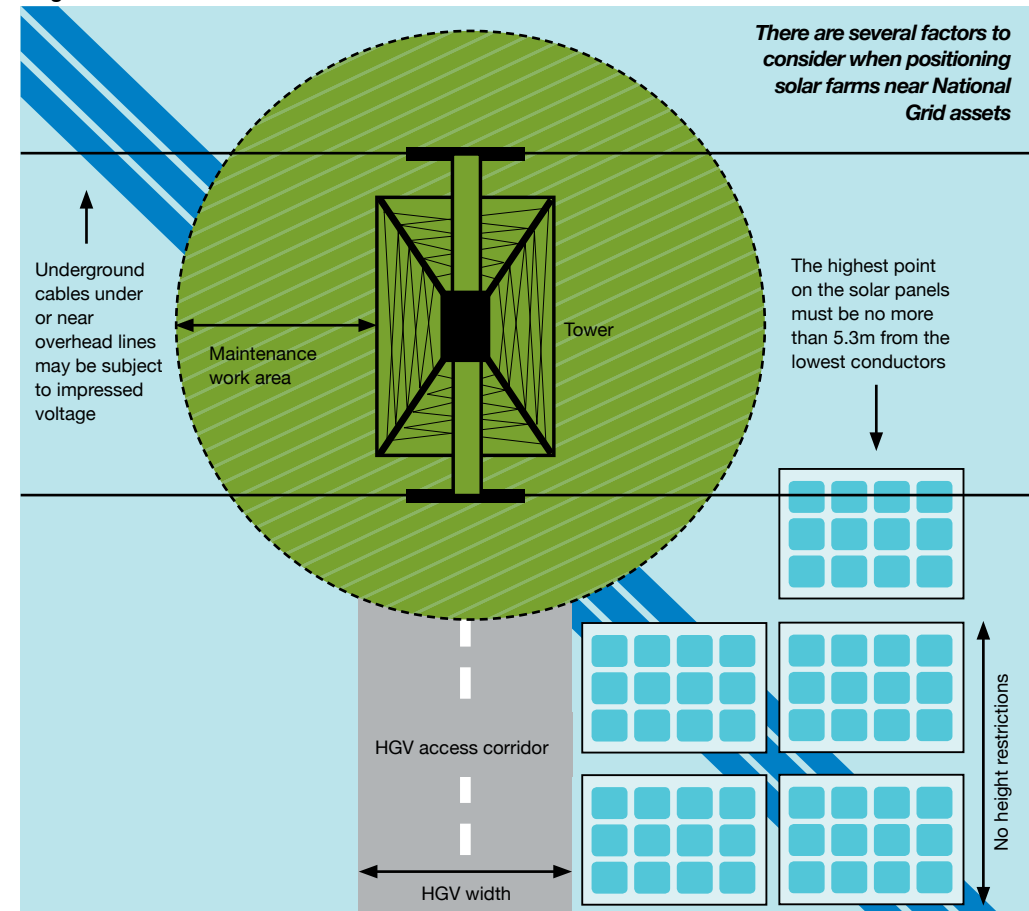

need full access for our vehicles, including access through any compound gates. During maintenance – and especially re-conductoring – National Grid would need enough space near our towers for winches and cable drums. If enough space is not available, we would require solar panels to be temporarily removed.



## Asset protection agreements

In some cases, where there is a risk that development will impact on National Grid's assets, we will insist on an asset protection agreement being put in place. The cost of this will be the responsibility of the developer or third party.

## Contact details

### Emergency situations

If you spot a potential hazard on or near an overhead electricity line, do not approach it, even at ground level. Keep as far away as possible and follow the six steps below:

- Warn anyone close by to evacuate the area
- Call our 24-hour electricity emergency number: **0800 404 090 (Option 1)**<sup>1</sup>
- Give your name and contact phone number
- Explain the nature of the issue or hazard
- Give as much information as possible so we can identify the location – i.e. the name of the town or village, numbers of nearby roads, postcode and (ONLY if it can be observed without putting you or others in danger) the tower number of an adjacent pylon
- Await further contact from a National Grid engineer

<sup>1</sup> It is critically important that you don't use this phone number for any other purpose. If you need to contact National Grid for another reason please use our Contact Centre at [www2.nationalgrid.com/contact-us](http://www2.nationalgrid.com/contact-us) to find the appropriate information or call 01926 653 000.

### Routine enquiries

Email:

**plantprotection@nationalgrid.com**  
(you will be sent an automated response to confirm receipt)

Call Plant Protection for free on:  
**0800 688 588**

Opening hours:  
**Monday to Friday 08:00-16:30**

Write to:  
**National Grid Plant Protection,  
Brick Kiln Street,  
Hinckley,  
Leicestershire  
LE10 0NA**

**Copyright © National Grid plc  
2016, all rights reserved**

All copyright and other intellectual property rights arising in any information contained within this document are, unless otherwise stated, owned by National Grid plc or other companies in the National Grid group of companies.